





CN-PBC 20 - 25 - 30 FLA 1Pole

Part No.	Poles	Full Load Amps	Coil Voltage	Line Voltage	Locked Rotor Amps	Resistive Amps Rating	Maximum Horsepower		Unit Weight (approx.)
							Voltage	Single Phase	
CN-PBC201	1	20	24V	240/277	120	30	120	1	0.5 lb.
			120V	480	100	30	240	2	0.23 kg
			208/240V	600	80	30			
CN-PBC251	1	25	24V	240/277	150	30	120	1	0.5 lb.
			120V	480	125	30	240	2	0.23 kg
			208/240V	600	100	30			
CN-PBC301	1	30	24V	240/277	180	40	120	1	0.5 lb.
			120V	480	150	40	240	2	0.23 kg
			208/240V	600	120	40			

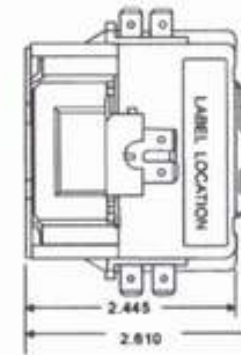

COIL TECHNICAL DATA 50/60hz	1 POLE CONTACTORS		
Nominal Coil Voltage	24	120	208/240
Maximum Pickup Volts	18	88	177
Drop-Out Volts Range	6-15	20-70	40-140
Nominal Inrush VA@50Hz	31	31	35
Nominal Inrush VA@60Hz	28	28	32
Nominal Sealed VA@50Hz	6	6	7
Nominal Sealed VA@60Hz	5	5	6
Nominal DC Resistance-Ohms	17.5	450	1800
Maximum Coil Voltage	30	132	264

OTHER SPECIFICATIONS	20-35 FLA
Line and Load Terminals	#10-32Screw*
Wire Size Awg Min-Max	16-8*
Tightening Torque(recommended)	25in.lbs
Coil Termination	Dual.250 QC(2)
Quick Connects.250 std.-1	Quad
ARC Covers	Optional
Insulation System	130°C Class B

*stranding must be split for #8 wire

*Permissible Ambient Temperature: -40°C/65°C -40°F/150°F

