



NDL Industries

APPLICATIONS

Commercial, Industrial, and Residential HVAC and Refrigeration

Copper Tee for Service Valve

Our robust design meets and exceeds the industry standards for holding maximum working pressure, garnering the reliability for transcritical CO2 refrigeration applications.



How we discovered the need for Service Tees

When working with CO2 refrigeration systems, it's important to consider the high pressure levels involved. Access ports commonly used in regular refrigeration systems may not be suitable for use with CO2 systems, as the Schrader valve seal can break under pressure, necessitating the venting of the entire line.

To avoid this issue, it is recommended to use a service valve that can be closed, enabling workers to easily connect and disconnect equipment as needed. While installing a service valve may require more time upfront, it is generally preferred by workers who regularly service equipment.

Our Tee fittings are designed specifically for the installation of service valves, streamlining the process and ensuring a secure, leak-free seal. By using a service valve and our specialized fitting, you can prevent high-pressure problems and make your work more efficient.



NDL Industries


Copper Tee for Service Valve

Tee copper fittings are used in refrigeration systems to connect three pipes or tubes. These fittings are made of high-quality C19400 copper, which is a strong and durable material that is resistant to corrosion and can withstand high temperatures and pressures. These Tee fittings are made specifically for installing a service valve on a tube. They are easy to install and provide a tight, leak-free seal. Suitable for service valves with 10 mm stainless steel stubs.

Technical Data

SIZE RANGE	From 1/2" up to 2 1/8"
APPLICATION	Air conditioning and refrigeration. Designed for high-pressure applications, especially for CO (R744) systems.
MATERIAL	Copper alloy CuFe2P C19400
MAXIMUM OPERATING PRESSURE	130 bar / 13 MPa / 1885 psi at 150° C
OPERATING TEMPERATURE	-196° C to 150° C / -320° F to 302° F
BURST PRESSURE	>390 bar / >39 MPa / >5656 psi
TUBE COMPATIBILITY	Compatible with main pipe types manufactured from copper iron alloys available on the market.

Specifications

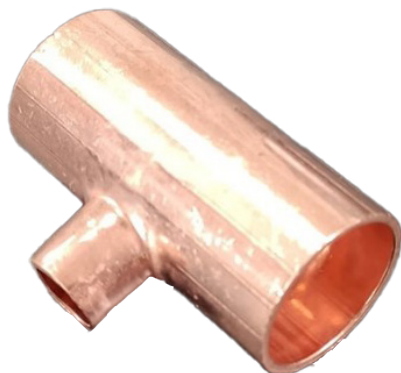

PART #	OD - DESCRIPTION	BOX QTY	WT (LB)	WT (G)
CO4001S	1/2" x 1/2" x 10 mm Reducing Tee C x C x C	100	0.055	25.00
CO4006S	5/8" x 5/8" x 10 mm Reducing Tee C x C x C	100	0.066	32.00
CO4017S	3/4" x 3/4" x 10 mm Reducing Tee C x C x C	100	0.110	50.00
CO4031S	7/8" x 7/8" x 10 mm Reducing Tee C x C x C	100	0.183	83.00
CO4048S	1-1/8" x 1-1/8" x 10 mm Reducing Tee C x C x C	100	0.30	136.00
CO4068S	1-3/8" 1-3/8" x 10 mm Reducing Tee C x C x C	30	0.551	250.00
CO4084S	1-5/8" x 1-5/8" x 10 mm Reducing Tee C x C x C	20	0.772	350.00
CO40102S	2-1/8" x 2-1/8" x 10 mm Reducing Tee C x C x C	15	1.764	800.00



Explore our full line of high-quality HVAC-R and plumbing products.

ndlinc.com | 1-866-635-6888 | sales@ndlinc.com

@ndlindustries

