PLUMBING



**APPLICATIONS** 

**Residential and Commercial Plumbing** 

Water Hose Connectors

NDL Water Hose Connectors provide reliable leak-proof connections for water heaters, toilets, faucets and dishwashers.



# **Specifications**

#### **Corrugated Water Heater Connectors**

Featuring full flow internal diameter with flexible corrugated 304 stainless steel exterior for superior performance over copper and braided 304 stainless steel without kinking or flattening. Working pressure: 125 PSI maximum; working temperature : -4°F to 212°F (-20°C to 100°C).

#### **Braided Faucet Connectors**

Connects water supply to faucets, featuring 304 stainless steel flexible braiding on flexible PVC core with EPDM O-rings for robust corrosion resistance. Working pressure: 125 PSI; working temperature: 68°F to 158°F (20°C to 70°C).

## **Braided Toilet Connectors**

Connects to standard toilets with ballcock inlet with either hand-tighten wing nut or OD compression connector for quick and easy installation. Features braided 304 stainless steel flexible braiding on flexible PVC core with EPDM O-rings that prevents leak-causing deterioration. Working pressure: 125 PSI; working temperature: 68°F to 158°F (20°C to 70°C).

## **Braided Dishwasher Connectors**


Connects water supply to dishwasher using 304 stainless steel braiding on flexible PVC core with EPDM O-rings that bends freely without kinking or crimping. Working pressure: 125 PSI; working temperature: 68°F to 158°F (20°C to 70°C).




## WHO Certifications and Approvals

- cUPC and NSF 14-61-372 recognized
- ASME A112.18.6-2017
- CSA B125.6-17


#### Corrugated Water Heater




#### Braided Faucet Connector



#### Braided Toilet Connector

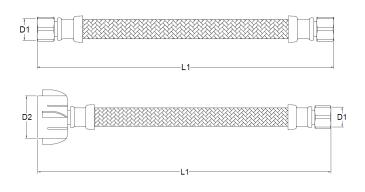

#### Braided Dishwasher Connector



# WHO Dimensions

PRODUCT	PART #	OD - DESCRIPTION	D1	D2	L1
CORRUGATED WATER HEATER	WH-12-12-18	3/4" x 18" Corrugated Water Heater Connector FIP x FIP	3/4" FIP		0.709
	WH-12-12-24	3/4" x 24" Corrugated Water Heater Connector FIP x FIP	3/4" FIP		0.945
BRAIDED TOILET CONNECTOR	WC-06-12	3/8" x 12" Braided Toilet Connector COMP	3/8" COMP		0.472
	WC-06-16	3/8" x 16" Braided Toilet Connector COMP	3/8" COMP		0.630
	WC-06-20	3/8" x 20" Braided Toilet Connector COMP	3/8" COMP		0.787
	WCFC-06-14-09	3/8" x 7/8" x 9" Braided Toilet Connector FC x BC	3/8" FC	7/8" BC	0.354
	WCFC-06-14-12	3/8" x 7/8" x 12" Braided Toilet Connector FC x BC	3/8" FC	7/8" BC	0.472
	WCFC-06-14-16	3/8" x 7/8" x 16" Braided Toilet Connector FC x BC	3/8" FC	7/8" BC	0.630
	WCFC-06-14-20	3/8" x 7/8" x 20" Braided Toilet Connector FC x BC	3/8" FC	7/8" BC	0.787
BRAIDED FAUCET CONNECTOR	WFCF-06-08-12	3/8" x 1/2" x 12" Braided Faucet Connector COMP x FIP	3/8" COMP	1/2" FIP	0.472
	WFCF-06-08-16	3/8" x 1/2" x 16" Braided Faucet Connector COMP x FIP	3/8" COMP	1/2" FIP	0.630
	WFCF-06-08-20	3/8" x 1/2" x 20" Braided Faucet Connector COMP x FIP	3/8" COMP	1/2" FIP	0.787
BRAIDED DISHWASHER CONNECTOR	WDH-06-12-48	3/8" x 3/4" x 48" Dishwasher Connector COMP x 90° FHT	3/8" COMP	3/4" FHT	1.890
	WDH-06-12-60	3/8" x 3/4" x 60" Dishwasher Connector COMP x 90° FHT	3/8" COMP	3/4" FHT	2.362
	WDH-06-12-72	3/8" x 3/4" x 72" Dishwasher Connector COMP x 90° FHT	3/8" COMP	3/4" FHT	2.835
	WDH-06-12-84	3/8" x 3/4" x 84" Dishwasher Connector COMP x 90° FHT	3/8" COMP	3/4" FHT	3.307



Explore our full line of high-quality HVAC-R and plumbing products. @ndlindustries

in f 🧿 🗙